



DATALOGGER TDS-540

High Performance, Easy Handling



Tokyo Measuring Instruments Laboratory Co., Ltd.

Everything inside

- "540" changes the strain measurement

The TDS-540 is a data logger incorporating every function required for static strain measurement. It accepts strain gauges, strain gauge type transducers, dc voltage, thermocouples and Pt-RTDs as inputs. Our unique measurement technique enables highly stable and accurate measurement by eliminating the effects of various thermoelectromotive forces, thermal zero shift of amplifier and power line noise. Strain measurement of up to 1000 points is possible in 0.4 seconds by combining with optional high speed switching boxes. High resolution mode of 0.1×10^{-6} strain is also possible. Furthermore, it is equipped with a newly developed remote data logger function which makes a remote control of the TDS-540 through internet browser possible. Optional wireless LAN allows measurement and monitoring of the data logger using a tablet terminal or smartphone. Other standard interfaces are Ethernet LAN, USB and RS-232C. In addition, our conventional switching boxes can be used successively.

You can configure a new strain measurement system according to your measurement needs with the TDS-540.



 Strain gauge

 Strain gauge type transducer

 DC voltage

 Thermocouple

 Pt-RTD

Reliability

◆ High accuracy and stability

Our unique measurement technique offers performance of eliminating the effects of various thermoelectromotive forces, thermal zero shift of amplifier and power line noise, that is superior to our former data logger TDS-530. More reliable and accurate measurement is realized.

◆ Reliable data storage

A secure internal memory device is provided for backup of measurement data in case of SD card failure. In addition, uninterruptible power supply circuit is provided for holding measurement data during unexpected power failure.

Operability

◆ Fast start

The TDS-540 starts up in 4 seconds, which is the fastest in our data loggers.

◆ Intuitive operation

The onboard color LCD with touch panel offers excellent intuitive operability. Response of touch panel has been improved to achieve stress-free operation. Often used functions are arranged in upper hierarchies. Input procedure for interval timer measurement has been simplified and the sensor ID setting display has been improved to offer easy operation.

Innovativeness

◆ Remote data logger function provided

Remote operation of TDS-540 through an internet browser is possible by the remote data logger function. In addition, downloading of measurement data files stored in TDS-540 is possible. The remote data logger function is available in any OS for personal computers without using dedicated software. It is applicable not only to a personal computer but also to multiple devices such as a tablet terminal or smartphone conforming to each communication mode.

◆ Selection of option units

Option units can be chosen when ordering your TDS-540. You can build the most suitable measurement system for you with these options.

Continuity

◆ Inherited excellent functions

Every type of switching box developed by TML in these 20 years can be used with the TDS-540. Conventional switching boxes equipped with our unique functions can be used in the same way as before utilizing the functions such as high speed scanning of 1000 points in 0.4 seconds (in combination with IHW-50G *), complete compensation method of strain, and 1-gauge 4-wire strain measurement with modular plug connection **.

*: Automatic measurement of 1000 points in 1 second is possible in interval measurement.

** : Measurement of strain in 1-gauge 4-wire method is a factory installed option.

◆ Pursuit of simple operation

You can view the diagram of strain gauge connection in the display of the TDS-540. You can return to monitor screen from any screen by merely pressing the HOME key provided on the side of the display.

Features

Remote data logger function



Remote operation in accordance with the communication mode of the user


The web server function (remote data logger function) is provided. Measurement and monitoring of TDS-540 are possible through an internet browser. Dedicated software is not necessary.




● Combination with wireless LAN router



● Ethernet LAN hub connection

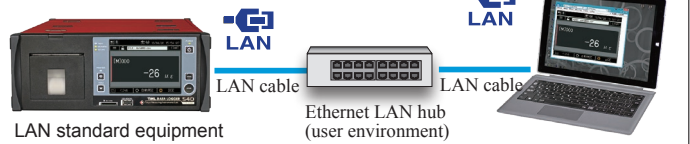

● Built-in wireless LAN (Factory installed option)

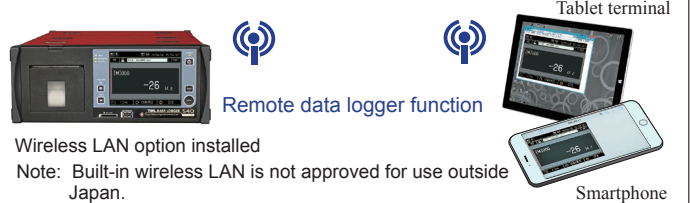

Downloading files by remote data logger function

Downloading (transferring) of measured data stored in the internal data memory or a data file stored in a SD card is possible during remote operation. Downloading of two or more files is also possible. (Note) Files stored in USB memory cannot be downloaded.



High speed scanning of 1000 points in 0.4 seconds

In combination with high speed switching box IHW-50G, scanning of 1000 points at maximum is performed in 0.4 seconds. The measurement speed is 1 second, and automatic measurement of 1000 points per every 1 second is possible using the interval timer.

Fast start in 4 seconds

Owing to the renovation of conventional starting mechanism, the TDS-540 starts only in 4 seconds after the power is turned on. This is the shortest time required in our data loggers. After the start, a monitor screen is displayed.

The right screen shows 10-channel monitoring.


FILE: data003.csv		START	
[M]000	-10.75 mm	[M]005	-23 με
[M]001	-24 με	[M]006	-21 με
[M]002	-26 με	[M]007	-23 με
[M]003	-32 με	[M]008	-26 με
[M]004	-32 με	[M]009	-25 με

INITIAL AUTO MEAS SETTING

Reliable data storage


● UPS (Uninterruptible power supply)

Even if the power supply is interrupted unexpectedly during file access, the UPS works to supply power continuously to prevent damage to the file.



● Data backup

A SD card is used for storing measured data. By the combined use of internal data memory which features excellent durability and reliability, data backup is secured even if SD card failure occurs.

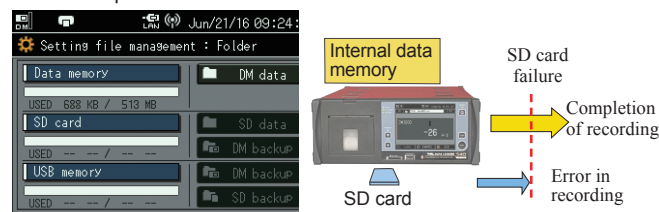

We supply SD cards exclusively prepared for industrial use, which have data retention period of about 10 years and are suited to repetition of writing. The USB memory is intended only for copying measured data and reading them.

LED color changes according to the type of sensor

In the built-in switching box, a connection terminal board, NDIS connector receptacle and LED are provided for each channel. The LED changes its emission color according to the type of connected sensor. You can know the type of the sensor by seeing the LED color without changing the screen to show the sensor mode.



- Red LED : Strain measurement
- Blue LED : DC voltage measurement
- Green LED : Temperature measurement

HOME key

On the display with touch panel, various settings are made by changing the screens in several hierarchies. It may take a few steps to return to the monitor screen from a setting screen. In such case, you can return to the monitor screen by merely pressing the HOME key. Quick operation is possible since the HOME key is positioned just above the START key.



Features

Display with touch panel for easy operation

The color LCD with touch panel provides excellent visibility and intuitive operability. Response of touch panel is 30 ms which is about twice as fast as our former model. You will not feel any stress in touch panel operation including changing screens. The display language is chosen between English and Japanese.

● SETTING : RECORD

MEAS
Sensor mode, Scanning channel, Sensor ID, etc.

CHECK
Check, Output of setting list, Output of automatic measurement setting list, etc.

REC :
File management, File output, Interface selection, etc.

CONF:
Date/Time, Measurement environment, Updating, Factory setting, etc.



● Selection of sensor mode

STRAIN-1
4GAGE/4GAGE 0.1μ/1G3W/
4G C350Ω/4G C350Ω 0.1μ, etc.

STRAIN-2
1G4W 120Ω, 240Ω, 350Ω
1G3W 120Ω-T, 240Ω-T, 350Ω-T

TEMP.
T(CC)/K(CA)/J(IC)/B/S/R/N/
E(GRC)/Pt100 3W


ETC.
DC 640mV/DC 64V
TML-NET/JUMP



● Wiring diagram of the sensor

This screen shows the diagrams of connection between the sensor and the switching box.

4G: Full bridge
1G: Quarter bridge 3-wire, Quarter bridge 2-wire
2G: Half bridge
1G-T: Temperature-integrated strain gauge (quarter bridge 3-wire)
2G C: Half bridge common dummy
TC: Thermocouple
DC: DC voltage 640mV, 64V
Pt: Pt-RTD

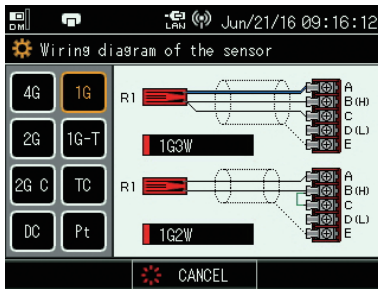

● Sensor ID setting

The TDS-540 has a function to store the sensor ID. In this function, sensor parameters including coefficient, unit, display digit and sensor types are set and stored in one package. If you want to replace some of the already set and stored sensors, you may recall the stored sensor ID and renew only the sensor parameters to be replaced, and the new setting will be completed. In the following screens, renewed sensor ID is recalled on the TDS-540 display, and the sensor ID is allocated to the specified channels.

Setting example



Renewed sensor ID is recalled

Allocated to specified channels
Former setting without renewal is displayed for CH. 004 which is out of the frame.

Information of sensor ID setting can be stored in SD card or USB memory and can be edited using a personal computer. The edited setting is stored again in the memory and recalled by the TDS-540.


● Automatic measurement

Interval timer

Quick setting:
Automatic start of measurement by every 1 minute, 10 minutes or 1 hour

Setting in table:
Interval, real time start, number of repetition, step number, etc. are set.

Sleep function:
Automatic power on/off before/after scanning

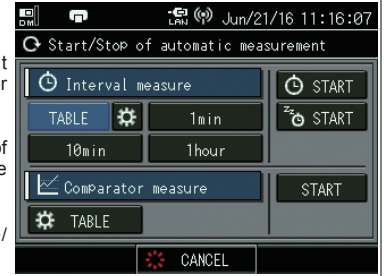

Monitor comparator

Setting in table:
Automatic measurement according to comparison value, comparison method (variation or upper/lower limit value), number of start, step number, etc.

Built-in switching box of 30 points at maximum

Factory installed option

The TDS-540 is equipped with a built-in switching box unit of 10 points as its standard specifications. The number of units is expandable to 2 or 3 as factory installed option making number of points to 20 or 30. Sensors such as strain gauges, strain gauge type transducers and thermocouples are connected to the built-in switching box.

Each point (channel) is equipped with a NDIS 7-pin connector receptacle and a LED with three emission colors to show the connected sensor type in addition to an ordinary terminal board. Also a surge absorber for lightning protection is provided for each point. The built-in switching box unit is available in normal speed mode or high speed mode for switching speed, and either mode should be specified when ordering. A built-in switching box unit for 1-gauge 4-wire measurement is under development.

The picture on the right may differ from the actual built-in switching box unit,



High speed printer



High speed thermal printer is integrated. Its printing speed is 0.04 seconds for one line of one channel.
Applicable paper: P-80 (80 mm wide)

High resolution mode (0.1×10^{-6} strain) provided
TEDS compatible (under development)

Accepts SD card and USB memory as recording media
Standard interface includes LAN, USB and RS-232C


Built-in wireless LAN available as factory installed option (for use in Japan only).

Applicable to network measurement system TML-NET
Available by combined use with ASW/SSW switching box control unit (factory installed option)


Complete Compensation Method of Strain provided

Functions and External dimensions


Front panel

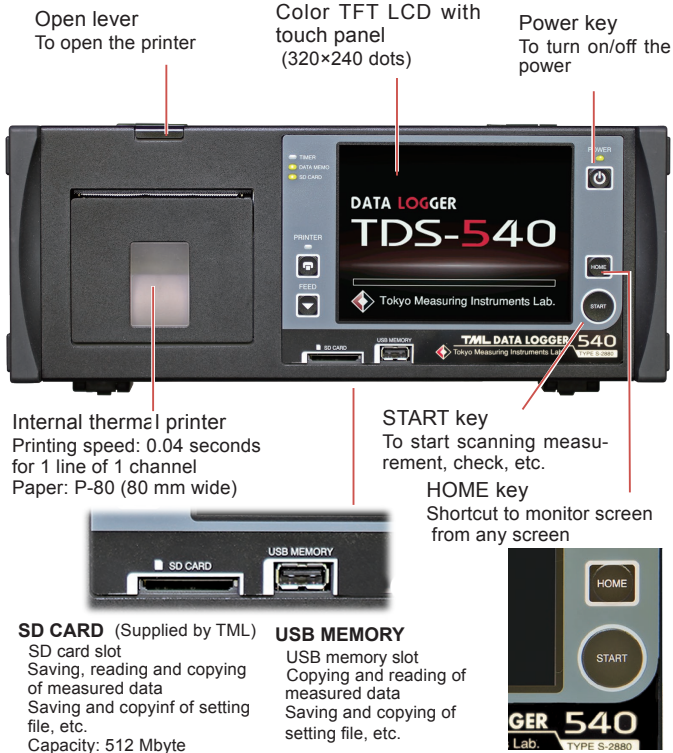

Rear panel

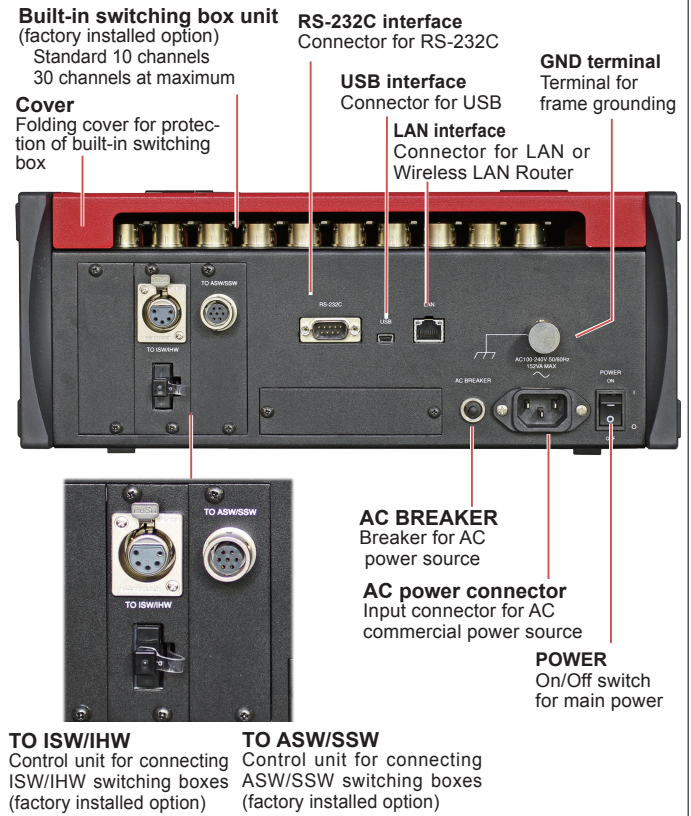

External dimensions

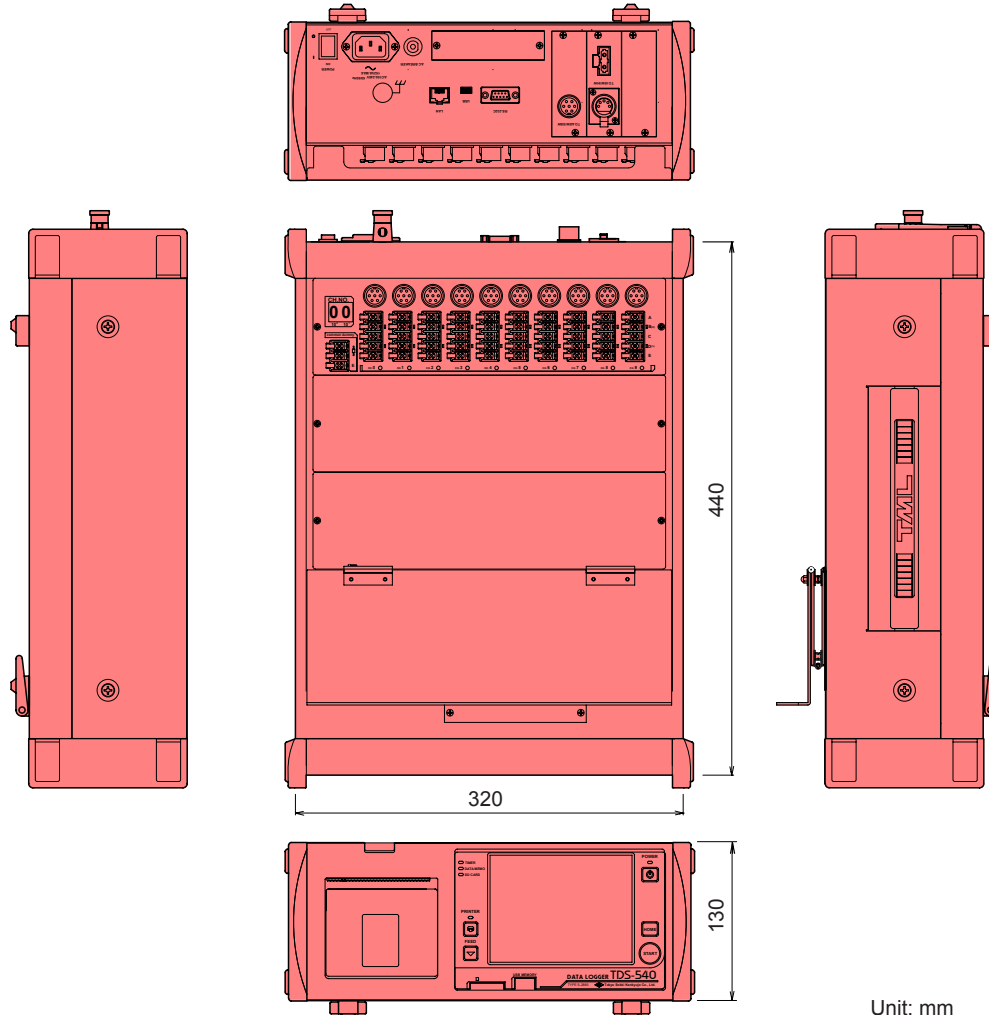

Specifications

TDS-540 Main body

Measuring performance

Number of measuring point	When switching boxes are connected	1000 points at maximum (2000 points at maximum when temperature integrated strain gauges are used)	
	When switching boxes are connected and built-in switching box is used in combination		
	Built-in switching box		
Scanning speed (Measuring speed in parentheses)	IHW-50G	0.4 s/1000 points (1 s/1000 points)	
	ISW-50G	2 s/1000 points (3 s/1000 points)	
	ISW-50C (under development)	3 s/1000 points (5 s/1000 points)	
	ASW/SSW	0.08 s/1 point (80 s/1000 points)	
	TML-NET	0.20 s/1 point (200 s/1000 points)	
	Built-in switching box	0.04 s/1 point, 0.08 s/1 point	
Measurement mode	Initial, Direct, Measure (only direct for temperature measurement)		
Simple measure	Coefficient: 1.000 Unit: Depends on sensor mode Decimal point: Depends on sensor mode		
Compensation mode	Comet NON/Comet A/Comet B		
Measuring point switching method	Scanning	Automatic switching from first channel to last channel (jump available)	
	Monitor	Repeated measurement of monitor channel (10 channels at maximum)	
Start of scanning measurement	Manual	Start key	
	Automatic	Interval timer, Monitor comparator	
	Interface	LAN/USB/RS-232C, Wireless LAN (option)	
Channel settings Settable for each channel	Coefficient	±(0.0001~99999)	
	Unit	40 kinds including µε, mV, °C, kgf and mm	
	Decimal point	Optionally settable 0~5 digits below decimal point	
	Offset	Writable for each channel	
	Sensor mode	Type of connected sensor is set for each channel	
		Strain Quarter bridge 3-wire 120/240/350Ω Half bridge common dummy, Half bridge Full bridge, Full bridge constant current 350Ω Full bridge high resolution mode Full bridge constant current 350Ω high resolution mode Full bridge 0-2V mode Temperature-integrated strain gauge 120/240/350Ω	
		DC voltage 640 mV, 64 V	
		Temperature Thermocouple T/K/J/B/S/R/E/N, Pt100 3W	
		TML-NET Various network modules	
		Sensor ID	Function
TEDES (under development)		Standards	IEEE 1451.4 Class 2 compatible (Template No. 33)
	Function	Reading and setting of sensor information	
Check function	During measurement	Open check, Thermocouple burnout check	
	Sensor	Insulation check, Sensitivity check, Dispersion check, Thermocouple burnout check, Leadwire resistance check, Bridge output check	
TML-NET	Available when ASW/SSW control unit is equipped.	ID check, Sensitivity check, Check module, Channel setting	

Interval timer

Function	Automatic scanning measurement according to the set intervals or real time	
Quick setting	Time intervals	1 minute/ 10 minutes/ 1 hour (measured at every 00 second or 00 minute)
Setting in table	Time intervals	Hour•Minute•Second, Settable up to 99 h 59 m 59 s for every step
	Real time start	Start time (Day•Hour•Minute•Second) is settable for every step
	Number of start times	Up to 99 times per step or infinite
	Number of steps	Programmable up to 50 steps
	GOTO step	Programmable loop to previous step
	GOTO comparator	Goes to step 1 of monitor comparator
Execution item	Scanning, Insulation check, Sensitivity check, Dispersion check, Thermocouple burnout check	
	Sleep function	Automatically turns power off/on when 1 minute or more is left between the end of scanning and the start of next scanning in interval timer measurement

Monitor comparator

Function	Automatic scanning measurement according to the set variation of monitor channel (1 point)	
Setting in table	Value for comparison	Settable for every step up to ±999999
	Method for comparison	Variation or upper/lower limit value
	Number of start times	Up to 99 times per step or infinite
	Number of steps	Programmable up to 50 steps
	GOTO step	Programmable loop to previous step
	GOTO interval	Goes to step 1 of interval timer

Time

Setting	Year, Month, Day, Hour, Minute, Second
Accuracy	±1 second/day (at 23°C ±5°C)
Backup	Approx. 60 days (when battery is fully charged)

Display • Operation

Display	Color TFT liquid crystal display with touch panel, 320 ×240 dots
Operation	Touch panel, POWER key, HOME key, START key, PRINTER key, FEED key

Data recording

Internal data memory	Function	Recording and reading of measured data, Saving of setting file
	Recording format	TDS format, CSV format, 540CSV format
	Capacity	512 Mbyte
SD card	Function	Recording, reading and copying of measured data Saving and copying of setting file, Writing and readout of sensor ID
	Physical format	FAT 16/32
	Recording format	TDS format, CSV format, 540CSV format
USB memory	Capacity	512 Mbyte (SD card: Specified by TML)
	Function	Reading and copying of measured data, Saving and copying of setting file, Saving and readout of sensor ID
	Physical format	FAT 16/32

Printer

Printing content	Measured data, Set value, Check result, etc.
Printing method	Thermal printing
Printing speed	0.04 seconds for 1 line of 1 channel
Applicable paper	P-80 (80 mm wide)

Interface

Wireless LAN (factory installed option for use in Japan only)	Conforms to IEEE802.11b/g/n, General purpose commands port server function (various settings, measurement, data acquisition), Web server function (Remote data logger function), DHCP server function
LAN	10BASE-T/100BASE-TX, General purpose commands port server function (various settings, measurement, data acquisition) Web server function (Remote data logger function)
USB	Compatible with USB2.0 protocol, General purpose commands applicable (various settings, measurement, data acquisition)
RS-232C	Conforms to RS-232C, Baud rate 9600/19200/115200 bps General purpose commands applicable (various settings, measurement, data acquisition)

Remote data logger

Function	Remote operation, remote monitoring and file downloading by web server function
Connection	LAN, Wireless LAN (factory installed option)
File download	Measured data in either data memory or SD card are downloaded/transferred in multiple ZIP format to a personal computer or a tablet terminal

Power source

Rated power source voltage	AC 100~240V 50/60 Hz
Power consumption	152 VA at maximum

Environment

Operating environment	0 ~ +50°C 85%RH or less (no dew condensation)
-----------------------	---

Others

External dimensions	320(W) × 130(H) × 440(D) mm (except rubber protectors and other projections)
Weight	Approx. 8 kg (with standard built-in switching box of 10 channels)

Built-in switching box unit Factory installed option

Number of measuring point	30 points at maximum (standard 10 points)	
Switcher	Semiconductor relay	
Lightning protection	Surge absorber for lightning protection is provided for each channel	
Input terminal	Accepts both screwing and soldering	
Connector receptacle	NDIS 7-pin connector receptacle	
Strain measurement		
Applicable connection method and gauge resistance	Quarter bridge 3-wire	120/240/350Ω
	Half bridge	60~1000Ω
	Half bridge common dummy	60~1000Ω
	Full bridge	60~1000Ω
	Full bridge constant current	350Ω
	Full bridge high resolution mode	120~1000Ω
	Full bridge constant current high resolution mode	350Ω
	Full bridge 0 - 2V mode	60~1000Ω
	Temperature-integrated strain gauge mode (Quarter bridge 3-wire)	120/240/350Ω T(JIS C-1602-1995, IEC 60584)
	Sensor cable extension range	Full bridge constant current 350Ω
Full bridge constant current high resolution 350Ω		Total cable resistance 400Ω or less
Sensitivity variation	Full bridge constant current 350Ω	+0.1~0.5% for Cable total resistance 100Ω
	Full bridge constant current high resolution 350Ω	
Compensation range of lead wire resistance Comet B (quarter bridge 3-wire)	Approx. 100 Ω or less for gauge resistance 120 Ω	
	Approx. 200 Ω or less for gauge resistance 240 Ω	
	Approx. 300 Ω or less for gauge resistance 350 Ω	
Stability on zero	Within ±1.0×10 ⁻⁵ strain / °C (quarter bridge) Within ±0.5×10 ⁻⁵ strain / °C (half bridge)	
Initial unbalance	Within +750×10 ⁻⁶ strain (quarter bridge) Within +500×10 ⁻⁶ strain (half bridge)	

Specifications

Built-in switching box unit Factory installed option

DC Voltage measurement	
V 1/1	DC±640mV
V 1/100	DC±64V
Input impedance	1 MΩ or more
Allowable input voltage between B and D	DC ±70 V at maximum
Thermocouple temperature measurement	
Applicable thermocouple	T, K, J, B, S, R, E, N JIS C1602-1995, IEC 60584
Pt-RTD temperature measurement	
Applicable Pt-RTD	Pt100 (500 μA Constant current 3-wire) JIS C1604-1997, IEC 60751

Strain measurement

Bridge excitation	DC 2 V 24 ms (at power source 50 Hz)	
Initial value memory range	±160000×10 ⁻⁶ strain	
Temperature coefficient of accuracy	±0.002%rdg / °C	
Secular change of accuracy	±0.02%rdg / year	
Measuring range and resolution	Measuring range	Resolution
	±40000×10 ⁻⁶ strain	1×10 ⁻⁶ strain
	±80000×10 ⁻⁶ strain	2×10 ⁻⁶ strain
	±160000×10 ⁻⁶ strain	4×10 ⁻⁶ strain
	±320000×10 ⁻⁶ strain	8×10 ⁻⁶ strain
Accuracy (at 23°C ±5°C) (Excluding 1-gauge 4-wire method)	±(0.05%rdg + 1 digit)	

Strain measurement with constant current method (full bridge only)

Bridge excitation	DC6mA 24ms (at power source 50 Hz)	
Bridge resistance	350Ω	
Initial value memory range	±160000×10 ⁻⁶ strain	
Temperature coefficient of accuracy	±0.002%rdg / °C	
Secular change of accuracy	±0.02%rdg / year	
Measuring range and resolution	Measuring range	Resolution
	±40000×10 ⁻⁶ strain	1×10 ⁻⁶ strain
	±80000×10 ⁻⁶ strain	2×10 ⁻⁶ strain
	±160000×10 ⁻⁶ strain	4×10 ⁻⁶ strain
	±320000×10 ⁻⁶ strain	8×10 ⁻⁶ strain
Accuracy (at 23°C ±5°C)	±(0.05%rdg+1 digit)	

Strain measurement in high resolution mode (full bridge only)

Bridge excitation	DC 5 V 48 ms (at power source 50 Hz)	
Initial value memory range	±16000.0×10 ⁻⁶ strain	
Temperature coefficient of accuracy	±0.002%rdg / °C	
Secular change of accuracy	±0.02%rdg / year	
Measuring range and resolution	Measuring range	Resolution
	±4000.0×10 ⁻⁶ strain	0.1×10 ⁻⁶ strain
	±8000.0×10 ⁻⁶ strain	0.2×10 ⁻⁶ strain
	±16000.0×10 ⁻⁶ strain	0.4×10 ⁻⁶ strain
	±32000.0×10 ⁻⁶ strain	0.8×10 ⁻⁶ strain
Accuracy (at 23°C ±5°C)	±(0.05%rdg+3digits)	

Strain measurement with constant current method in high resolution mode (full bridge only)

Bridge excitation	DC 14 mA 48 ms (at power source 50 Hz)	
Bridge resistance	350 Ω	
Initial value memory range	±16000.0×10 ⁻⁶ strain	
Temperature coefficient of accuracy	±0.002%rdg / °C	
Secular change of accuracy	±0.02%rdg / year	
Measuring range and resolution	Measuring range	Resolution
	±4000.0×10 ⁻⁶ strain	0.1×10 ⁻⁶ strain
	±8000.0×10 ⁻⁶ strain	0.2×10 ⁻⁶ strain
	±16000.0×10 ⁻⁶ strain	0.4×10 ⁻⁶ strain
	±32000.0×10 ⁻⁶ strain	0.8×10 ⁻⁶ strain
Accuracy (at 23°C ±5°C)	±(0.05%rdg+3digits)	

DC voltage measurement

Initial value memory range		
V1/1	±160.000mV	
V1/100	±16.0000V	
Temperature coefficient of accuracy	±0.0024%rdg/°C	
Secular change of accuracy	±0.024%rdg/year	
Measuring range and resolution	Measuring range	Resolution
	±40.000mV	0.001mV
	±80.000mV	0.002mV
	±160.000mV	0.004mV
	±320.000mV	0.008mV
Accuracy (at 23°C ±5°C)	±(0.05%rdg+3digits)	

DC voltage measurement

Measuring range and resolution	V 1/100	Measuring range	Resolution
		±4.0000V	0.0001V
		±8.0000V	0.0002V
		±16.0000V	0.0004V
		±32.0000V	0.0008V
Accuracy (at 23°C ±5°C)	±(0.05%rdg+3 digits)		
Accuracy (at 23°C ±5°C)	±(0.05%rdg+2 digits)		

Thermocouple temperature measurement (JIS C1602-1995, IEC 60584)

Applicable thermocouple		T, K, J, B, S, R, E, N		
Linearization		Digital processing		
Type	Measuring range	Resolution	Accuracy (at 23°C ±5°C)	
			External RJC	Internal RJC
T	-250 ~ -200°C	0.1°C	±(0.19%rdg+0.5°C)	±(0.19%rdg+3.8°C)
	-200 ~ -100°C	0.1°C	±(0.09%rdg+0.2°C)	±(0.09%rdg+1.6°C)
	-100 ~ +400°C	0.1°C	±(0.06%rdg+0.2°C)	±(0.06%rdg+0.9°C)
K	-210 ~ -160°C	0.1°C	±(0.11%rdg+0.3°C)	±(0.11%rdg+1.8°C)
	-160 ~ 0°C	0.1°C	±(0.08%rdg+0.2°C)	±(0.08%rdg+1.1°C)
	0 ~ +960°C	0.1°C	±(0.06%rdg+0.1°C)	±(0.06%rdg+0.7°C)
J	+960 ~ +1370°C	0.1°C	±(0.06%rdg+0.6°C)	±(0.06%rdg+1.2°C)
	-200 ~ -160°C	0.1°C	±(0.09%rdg+0.2°C)	±(0.09%rdg+1.4°C)
	-160 ~ 0°C	0.1°C	±(0.07%rdg+0.1°C)	±(0.07%rdg+1.0°C)
B	0 ~ +700°C	0.1°C	±(0.05%rdg+0.1°C)	±(0.05%rdg+0.6°C)
	+700 ~ +1200°C	0.1°C	±(0.06%rdg+0.4°C)	±(0.06%rdg+0.8°C)
	+200 ~ +280°C	0.5°C-0.4°C	±(0.03%rdg+1.5°C)	±(0.03%rdg+1.5°C)
S	+280 ~ +800°C	0.3°C-0.1°C	±(0.03%rdg+0.6°C)	±(0.03%rdg+0.6°C)
	+800 ~ +1760°C	0.1°C	±(0.04%rdg+0.4°C)	±(0.04%rdg+0.4°C)
	- 10 ~ +200°C	0.1°C	±(0.06%rdg+0.6°C)	±(0.06%rdg+1.3°C)
R	+200 ~ +1760°C	0.1°C	±(0.05%rdg+0.4°C)	±(0.05%rdg+0.8°C)
	- 10 ~ +150°C	0.1°C	±(0.06%rdg+0.6°C)	±(0.06%rdg+1.3°C)
	+150 ~ +1760°C	0.1°C	±(0.05%rdg+0.4°C)	±(0.05%rdg+0.8°C)
E	-210 ~ +550°C	0.1°C	±(0.10%rdg+0.2°C)	±(0.10%rdg+1.6°C)
	+550 ~ +1000°C	0.1°C	±(0.06%rdg+0.3°C)	±(0.06%rdg+0.7°C)
	-200 ~ 0°C	0.1°C	±(0.11%rdg+0.4°C)	±(0.11%rdg+1.8°C)
N	0 ~ +1090°C	0.1°C	±(0.05%rdg+0.2°C)	±(0.05%rdg+0.7°C)
	+1090 ~ +1300°C	0.1°C	±(0.06%rdg+0.6°C)	±(0.06%rdg+0.9°C)

Note: Accuracy of sensor is not included. Thermocouple B does not use reference junction.

Pt-RTD temperature measurement (JIS C1604-1997, IEC 60751 Pt100)

Applicable Pt-RTD	Pt100
Measuring method	3-wire (Pt3W)
Linearization	Digital processing
Temperature coefficient of accuracy	±0.0020%rdg / °C
Secular change of accuracy	±0.05%rdg / year
Measuring range	-200 ~ +850°C
Resolution	0.1°C
Accuracy (at 23°C ±5°C)	±(0.05%rdg + 0.3°C)

Built-in 1-gauge 4-wire unit Factory installed option (under development)

Number of measuring point	Expandable up to 30 points by every 10 points	
Switcher	Semiconductor relay	
Modular connector	6-pin modular jack	
Applicable gauge resistance	120/240/350 Ω	
Sensor cable extension range	Total cable resistance 200 Ω or less	
Stability on zero	Within ±1.0×10 ⁻⁶ strain / °C	
Initial unbalance	Within +500×10 ⁻⁶ strain	
Initial value memory range	±160000×10 ⁻⁶ strain	
Temperature coefficient of accuracy	±0.002%rdg / °C	
Secular change of accuracy	±0.02%rdg / year	
Measuring range and resolution	Measuring range	Resolution
	±40000×10 ⁻⁶ strain	1×10 ⁻⁶ strain
	±80000×10 ⁻⁶ strain	2×10 ⁻⁶ strain
	±160000×10 ⁻⁶ strain	4×10 ⁻⁶ strain
	±320000×10 ⁻⁶ strain	8×10 ⁻⁶ strain
Accuracy (at 23°C ±5°C)	±(0.25%rdg + 1 digit)	

ISW/IHW unit Factory installed option

Specifications on measurement depend on the specifications of each switching box.

Connection		
Applicable type	IHW-50G/ISW-50G/ISW-10D	
ELECTRICAL (RS-422)	Number of connection and extension distance	20 switching boxes for 1000 points, 800 m between instruments
	Connection cable	Extension cable for ISW/IHW CR-832M
OPTICAL (Optical fiber)	Number of connection and extension distance	20 switching boxes for 1000 points, 800 m between instruments
	Connection cable	Optical fiber extension cable for ISW/IHW CR-842M

ASW/SSW unit Factory installed option

Specifications on measurement depend on the specifications of each switching box.

Connection

Applicable type	SSW-50D/SSW-50C/ASW-50C/NDR-100		
Applicable network module type	All types, One NDR-100 is required for every 100 points		
Number of connection and extension distance	Booster power not supplied	8 switching boxes for 400 points, Extension distance 120 m	
	Booster power supplied	20 switching boxes for 1000 points, Extension distance 2 km	
Connection cable	Switching box connection cable CR-65 or Switching box extension cable CR-800		

Note: Number of connection and extension distance of network modules depend on the specifications of NDR-100.

Factory installed option


Built-in switching box unit

- : High speed type with terminal board and connector receptacle
Option code -H
- : Normal speed type with terminal board and connector receptacle
Option code None

Built-in 1-gauge 4-wire unit (Note *)

- : 1-gauge 4-wire strain measurement Option code -HF (under development)

One unit for 10 channels is the standard specification.
Two or three units for 20 or 30 channels are available as factory installed option.



Note: The picture may differ from the actual built-in switching box unit.

Standard accessories

Quick Reference	1 copy
Operation manual (CD)	1 piece
AC power cable CR-01	1 piece
Ground wire CR-20	1 piece
Printer paper P-80	2 rolls
Cross slot screwdriver	1 piece

Note: Covers can be added for a option



ASW/SSW switching box control unit: Option code -01

ISW/IHW switching box control unit: Option code -02

If both of these two units are installed (ASW/SSW + ISW/IHW), its option code is -03.



ISW/IHW switching box IHW-50G (optional)

ASW/SSW switching box SSW-50D (optional)



Main functions of generally used switching boxes

Switching box type	Number of measuring points	Connector receptacle included	Strain	Constant current mode	High resolution mode	DC voltage	Thermo-couple	Pt-RTD	Arrestor equipped	1000 point measurement	Scanning speed	1-gauge 4-wire *
IHW-50G	50	-	●	●	●	●	●	●	●	1s	0.4s/1000 points	●
IHW-50G-05		●										
ISW-50G	50	-	●	●	●	●	●	●	●	3s	2s/1000 points	●
ISW-50G-05		●										
SSW-50D	50	-	●	●	●	●	●	-	●**	80s	0.08s/point	●
SSW-50D-05		●										
ASW-50C	50	-	●	●	●	●	●	-	-	80s	0.08s/point	-
ASW-50C-05		●										

Note *: 1-gauge 4-wire method Measurement is possible by external switching boxes having the function in addition to the built-in 1-gauge 4-wire unit.

Note **: Factory installed option

* 1-gauge 4-wire strain measurement method (abbreviated as 1G4W)

In our unique 1-gauge 4-wire strain measurement method, a 4-wire lead wire is connected to a strain gauge, and the lead wire is quickly connected to a switching box using a modular plug. Labor and time for lead wire connection is largely reduced in multi-point measurement.

This method has the following advantages which eliminate the need of compensation for conventional quarter bridge method.

- Sensitivity drop is not caused by the lead wire resistance
 - Thermal output is not caused by the change of lead wire temperature
 - Measured value is not affected by the contact resistance of the lead wire
- In addition, this method enables lead-free connection using modular plug.

Wireless LAN unit: Option code -04

Remote operation of data logger TDS-540 is possible through internet browser. Operation from every terminal device is available without using dedicated software.

Built-in wireless LAN unit is not approved for use outside Japan. For remote operation of TDS-540 outside Japan, use a commercially available wireless LAN router for remote operation outside Japan.

Option code TDS-540(-30HF -07)

Built-in unit options		Other options	
None	10 channels (standard)	None	None
-20	20 channels	-01	ASW/SSW
-30	30 channels	-02	ISW/IHW
-20H	High speed 20 channels	-03	ASW/SSW+ISW/IHW
-30H	High speed 30 channels	-04	Wireless LAN
-10HF	(High speed +1G4W)_10 channels	-05	Wireless +ASW/SSW
-20HF	(High speed +1G4W)_20 channels	-06	Wireless +ISW/IHW
-30HF	(High speed +1G4W)_30 channels	-07	Wireless +ASW/SSW+ISW/IHW

The contents of this catalog are subject to change without prior notice.
The contents of this catalog are as of October 2023. TML Pam E-3011G



Approval Certificate ISO9001
Design and manufacture of strain gauges, strain measuring equipment and transducers



8-2, Minami-ohi 6-chome, Shinagawa-ku, Tokyo 140-8560, JAPAN
TEL: +81-3-3763-5614 FAX: +81-3-3763-6128

